


# Rockfon Eclipse®

## Datasheet



# Rockfon Eclipse®









- Innovative and aesthetically pleasing frameless acoustic ceiling island, offering excellent sound absorption and supplied in a smooth, deep-matt, super white surface providing high light reflection, light diffusion and anti-static properties, extending its product lifetime
- Rockfon Eclipse is available in a variety of shaped formats with a clean minimalistic A edge and an unlimited custom colour range using NCS
- Quick and easy to install, Rockfon Eclipse can be used alone or where a traditional suspended ceiling cannot be installed
- Perfect for thermal mass installations with rear surface providing excellent heat and light reflection

## Product Description

- Stone wool island
- Visible side: smooth, deep matt, super white painted fleece
- Rear side: white backing fleece
- Painted edges

## Application Areas

- Retail
- Education
- Office
- Leisure

Edge detail	Shapes	Module size (mm)	Weight (kg/unit)	MS / MS easy access (mm)	Recommended installation System
	Square 	1160 x 1160 x 40	9	15 / 150	Rockfon® System Eclipse Island™
	Rectangle 	1760 x 1160 x 40	13	15 / 150	Rockfon® System Eclipse Island™
		2360 x 1160 x 40	17	15 / 150	Rockfon® System Eclipse Island™
	Circle 	800 x 800 x 40	3	15 / 150	Rockfon® System Eclipse Island™
	 	1160 x 1160 x 40	7	15 / 150	Rockfon® System Eclipse Island™
			4	15 / 150	Rockfon® System Eclipse Island™
			6	15 / 150	Rockfon® System Eclipse Island™
	Ovoid 	1760 x 1160 x 40	10	15 / 150	Rockfon® System Eclipse Island™
	Freeform 		9	15 / 150	Rockfon® System Eclipse Island™

MS = Minimum Suspension

Rectangular and square Rockfon Eclipse in custom colours are only available in a Be-edge (bevelled edge)

Size 2360 x 1160 x 40 is only available in custom colours on one side

Contact us for special shapes, colours, sizes, lead times and minimum quantities.




## Performance




### Sound absorption

$A_{eq}$  (m<sup>2</sup>/item)


\* Distance between items greater or equal to 2000mm. Further acoustic data available; contact your local Rockfon technical support.

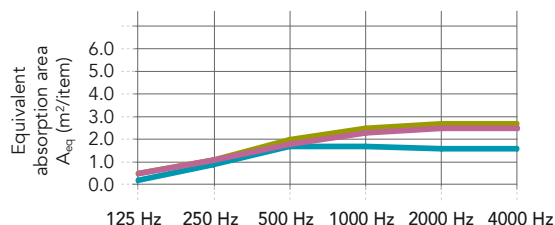

Square 1160 single item* (suspension height: 13mm)	0.2	0.9	1.7	1.7	1.6	1.6
Square 1160 single item* (suspension height: 500mm)	0.5	1.1	2.0	2.5	2.7	2.7
Square 1160 array of 5 items, 300mm distance (suspension height 500mm)	0.5	1.1	1.8	2.3	2.5	2.5

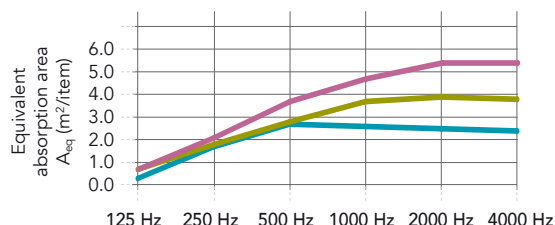

Rectangle 1760 single item* (suspension height: 13mm)	0.3	1.7	2.7	2.6	2.5	2.4
Rectangle 1760 single item* (suspension height: 500mm)	0.7	1.8	2.8	3.7	3.9	3.8
Rectangle 2360 single item* (suspension height: 500mm)	0.7	2.1	3.7	4.7	5.4	5.4

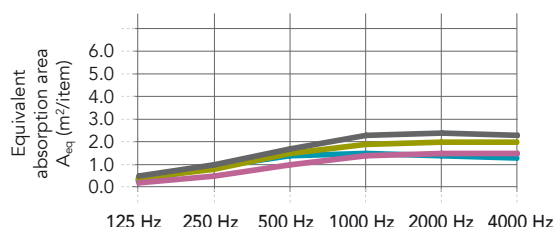

Circle 1160 single item* (suspension height: 13 mm)	0.3	0.9	1.4	1.5	1.4	1.3
Circle 1160 single item* (suspension height: 500 mm)	0.4	0.8	1.5	1.9	2.0	2.0
Triangle 1160 single item* (suspension height: 500 mm)	0.2	0.5	1.0	1.4	1.5	1.5
Hexagon 1160 single item* (suspension height: 500 mm)	0.5	1.0	1.7	2.3	2.4	2.3



### Reaction to fire

A1

Rockfon Eclipse Rectangle 2360: A2-s1,d0



### Light reflection and light diffusion

87% light reflection (rear side: 79%)

>99% light diffusion



### Humidity and sag resistance

Up to 100% RH.

No visible deflection in high humidity  
Rockfon Eclipse is not suitable for use in swimming pools or outdoors.

For more information, please contact Rockfon.



### Cleaning

- Vacuum
- Damp cloth



### Hygiene

Stone wool provides no sustenance to microorganisms



### Surface durability

Enhanced durability and dirt resistance.

Wet-scrub resistance: Wet-scrub resistance:

The wet-scrub resistance is tested in accordance with EN ISO 11998:2007, rated on a scale from 1 to 5, where 1 is best.



### Environment

Recyclable



### Indoor environment

A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products



### Visual appearance

Super white surface

L value: 94.5

The whiteness (L value) of the product is tested in accordance with ISO 7724 and measured on a scale from 1 (black) to 100 (white).


Deep matt surface, perfect in critical side-light

Gloss: 0.8 gloss unit at 85° angle

The gloss of the product is tested in accordance with ISO 2813.



Rockfon® is a registered trademark  
of the ROCKWOOL Group.

 [twitter.com/RockfonUK](https://twitter.com/RockfonUK)

 [linkedin.com/company/Rockfon-as/](https://linkedin.com/company/Rockfon-as/)

 [instagram.com/Rockfon\\_official/](https://instagram.com/Rockfon_official/)

 [youtube.com/RockfonUK](https://youtube.com/RockfonUK)

07.2020 | All colour codes mentioned are based on the NCS - Natural Colour System<sup>®</sup> property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.



#### **Rockfon**

ROCKWOOL Limited T/A Rockfon  
14th Floor, Chiswick Tower, 389 Chiswick High Road,  
London W4 4AL  
Tel: +44 (0) 208 222 7457  
[www.rockfon.co.uk](http://www.rockfon.co.uk)