


Rockfon Humitec® Baffle

Datasheet

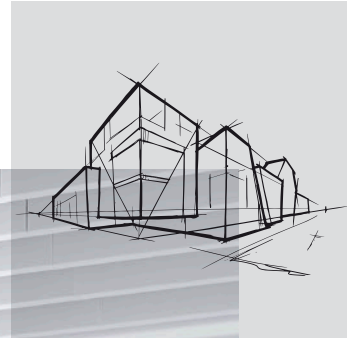

Rockfon Humitec® Baffle


- Flexible free-hanging acoustic solutions, perfect for humid or harsh indoor environments or for areas that require regular cleaning
- Built to withstand humid and corrosive Class D environments
- Supplied with a robust and durable frame that protects the baffle edges from damage and ensures cleanliness
- Ideal for areas where frequent or unhindered access to services is required

Product Description

- Panel: Micro-textured white painted, water repellent fleece
- Frame: White powder coated hot galvanised steel with multi-functional clip that offers several installation options.

Application Areas

- Healthcare
- Leisure
- Industry

Edge detail	Module size (mm)	Weight (kg/unit)	Recommended installation System
4F 	1200 x 450 x 50	3.4	Rockfon® System Humitec Baffle™
	1200 x 600 x 50	4.2	Rockfon® System Humitec Baffle™

Edge detail 4F = 4 Framed




Performance



Sound absorption

A_{eq} (m²/item)

C - centre distance between baffle rows,
H - suspension height: net distance between baffle
and soffit

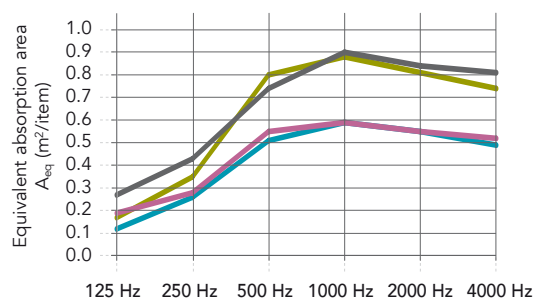

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
1200x600x50 (4F) - Baffles in rows, C600, H300	0.12	0.26	0.51	0.59	0.55	0.49
1200x600x50 (4F) - Baffles in rows, C1200, H300	0.17	0.35	0.80	0.88	0.81	0.74
1200x600x50 (4F) - Baffles in rows, C600, H40	0.19	0.28	0.55	0.59	0.55	0.52
1200x600x50 (4F) - Baffles in rows, C1200, H40	0.27	0.43	0.74	0.90	0.84	0.81



Reaction to fire

A2-s1,d0



Light reflection

85%



Cleaning

- Vacuum
- Damp cloth
- Dry steam cleaning (twice a year)
- Low pressure foam cleaning
- High pressure cleaning: Max. 80 bar, min. 1 meter distance, water spread at a 30° angle.
- Chemical resistance: resistant to diluted solutions of ammonia, chlorine and hydrogen peroxide.



Hygiene

Stone wool provides no sustenance to microorganisms



Surface durability

Enhanced durability and dirt resistance.



Safety against failure

Class D (40°C, 95% RH)

According to EN13964:2014



Corrosion resistance

Class D (EN13964)



Environment

The stone wool core is recyclable




Indoor environment

A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products



Rockfon® is a registered trademark
of the ROCKWOOL Group.

 twitter.com/RockfonUK

 linkedin.com/company/Rockfon-as/

 instagram.com/Rockfon_official/

 youtube.com/RockfonUK

07.2020 | All colour codes mentioned are based on the NCS - Natural Colour System[®] property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.



Rockfon

ROCKWOOL Limited T/A Rockfon
14th Floor, Chiswick Tower, 389 Chiswick High Road,
London W4 4AL
Tel: +44 (0) 208 222 7457
www.rockfon.co.uk