


Rockfon® MediCare® Block

Datasheet



Rockfon® MediCare® Block


- Specifically designed for use in high-risk, pressurised healthcare environments where high cleanability is required such as emergency rooms, washing facilities and intensive care (compliant with HTM 60). For use in operating theatres, seek client approval
- Does not contribute to the growth of MRSA, Clean Room Classification ISO Class 2
- Very good cleanability properties for most stringent cleaning methods, chemical resistance classification 'Excellent'

Product Description

- Mineral wool tile encased within an air- and watertight inert film

Application Areas

- Healthcare

Edge detail	Module size (mm)	Weight (kg/m ²)	MS / MS easy access (mm)	Recommended installation System
 <p>A24</p>	600 x 600 x 25	2.0	50 / 100	Rockfon® System T24 A, E ECR™
	1200 x 600 x 25	2.0	50 / 100	Rockfon® System T24 A, E ECR™


MS = Minimum Suspension



Performance



Sound absorption
 α_w : 0.85 (Class B)

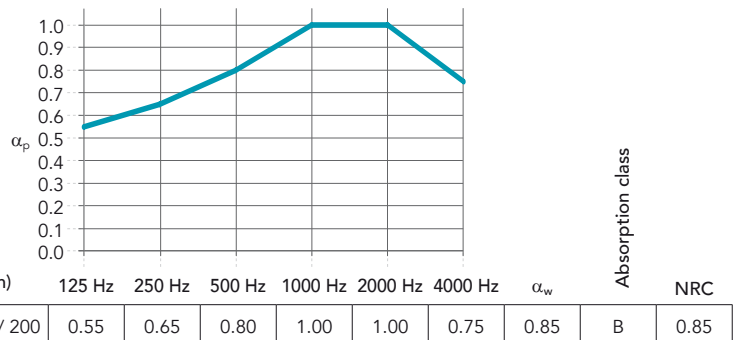

Reaction to fire
 B-s1,d0



Light reflection
 74%



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity



Cleaning

- Vacuum
- Damp cloth
- Dry steam cleaning (daily)
- Resistant to disinfection using Hydrogen Peroxide Vapour, with no impact on aeration time
- Chemical resistance: Tests carried out in accordance with ISO 2812-1 ("Determination of resistance to liquids - Part 1: Immersion in liquids other than water") and classification in accordance with VDI 2083 Part 17. Results are classified as 'Excellent' with the following detergents and disinfectants:
 - Formalin (37%)
 - Ammonia (25%)
 - Hydrogen peroxide (30%)
 - Sulphuric acid (5%)
 - Phosphoric acid (30%)
 - Peracetic acid (15%)
 - Hydrochloric acid (5%)
 - Isopropanol (100%)
 - Sodium hydroxide (5%)
 - Sodium hypochlorite (15%)



Hygiene

Microbiological class M1 fulfilling the requirements of Zone 4 (very high risk) defined by NF S 90-351:2013. Tested with:

- Methicillin Resistant Staphylococcus Aureus (MRSA)
- Candida Albicans
- Aspergillus Brasiliensis



Surface durability

The high performance inert film of Rockfon MediCare Block provides enhanced durability and water-repellence. The film contains DMAc (CAS 127-19-5) in a concentration $\geq 0.1\%$ and $< 1\%$. There is no intended release under normal foreseeable conditions of use.



Clean Room
 ISO Class 2





Air pressure


Suitable in areas where differential pressure is required to prevent infections from spreading. Due to its high performance film, combined with HDC2 clips (8 clips per 600 x 600mm tile), it achieves an air leakage rate of less than 0.5 m³/h/m²/Pa under a pressure range of 5 to 40 Pa.

For more information, please contact customer service.

Rockfon® is a registered trademark
of the ROCKWOOL Group.

 twitter.com/RockfonUK

 linkedin.com/company/Rockfon-as/

 instagram.com/Rockfon_official/

 youtube.com/RockfonUK

07.2020 | All colour codes mentioned are based on the NCS - Natural Colour System[®] property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.



Rockfon
ROCKWOOL Limited T/A Rockfon
14th Floor, Chiswick Tower, 389 Chiswick High Road,
London W4 4AL
Tel: +44 (0) 208 222 7457
www.rockfon.co.uk